UFKES Greentec



Greentec

- GRINDERS
- WOOD CHIPPERS
- FORESTCUTTERS
- STUMP GRINDERS
- FOREST MULCHERS

About us



Ufkes Greentec produce Wood chippers, Stump grinders and Grapple saws for sale to professionals worldwide. All stages of design, production and testing are done in house by the Ufkes Greentec Team. We offer full after sales service through our in house engineers and network of approved dealers worldwide.

Having spent years working in the design, sales and servicing of forestry and arboricultural equipment, in 2004 Jippe Ufkes used his extensive experience to start designing and producing his own equipment better able to meet the demands and requirements of professional users. A new factory was opened in 2009 in Drachten in the North of the Netherland. Since then the product range has expanded to include woodchippers in a wide variety of configurations, PTO, Trailer – with or without bin, engine powered, track and truck mounted as well as stump grinders, grapple saws, forestry mulchers and grinders. Additional facilities have been added over the years, a new dedicated production facility of 4400 m2 and a separate after sales and service department.



Modern production factory

Our Ufkes Greentec machines are entirely designed and produced in our state-of-the-art 4500 m2 factory located in Drachten, the Netherlands.



Sales and Service - the Netherlands

Displaying the extensive range of machinery available, while also providing product servicing and maintenance.



Production Belgium

Our Ufkes Thomas aerial platforms are entirely designed and produced in our state-of-the-art 2400 m2 factory located near Brussel, Belgium.



Service

Providing onsite service, maintenance and repairs, by our highly skilled team of professionals.



Parts

Because we produce our machines in house, we have all parts readily available in our 7,000 m^2 warehouse.



The Greentec team

Our passionate and enthusiastic team is our greatest asset, providing a friendly, competent and complete customer service experience.

Greentec stump grinders

Greentec SHARK 4W

ca. 315 kg 35-95 l/min 480 mm 160-400 bar

- Constant grinding, swivelling motion in both directions equal due to double cylinders
- Hydraulic lifting cylinder makes the machine compact during transport and allows for deeper grinding
- Dozer for additional stability during grinding, can also be used for levelling, easily removed for extra-deep grinding



Greentec SHARK 4

2,8-7,5 tonnes ca. 120 kg 35-95 l/min 480 mm 160-400 bar

- Highly efficient piston motor

Options:

- Various oil engines and quick changes



Greentec SHARK 6

5,5-14 tonnes ca.320 kg 50-130 l/min 660 mm 160-380 bar

- Highly efficient piston motor

Options:

- Hydraulic swivel head (270°)
- Extra cutting teeth on side grinding wheel
- Various oil engines and quick changes



Greentec SHARK 8

13-28 tonnes ca.740 kg 80-235 l/min 870 mm 200-420 bar

- Highly efficient piston motor

Options:

- Hydraulic swivel head (270°)
- Extra cutting teeth on side grinding wheel
- Adjustable piston motor
- Various quick changes



Greentec three-point stump grinders

Greentec 660 stump grinder

40-120 HP 60 cm 660 mm 675 kg 195 cm

- Telescopic 50 cm
- Above ground 55 cm
- In ground 60 cm

Options:

- Rubber screens



Greentec SHARK 8 COMPACT

100-200 hp ca.595kg 110-160 l/min 870 mm 200-380 bar

- Highly efficient piston motor
- Compact version weight: app. 595 kg

Options:

- Hydraulic swivel head (270°)
- Extra cutting teeth on side grinding wheel
- Various quick changes



Greentec PIRANHA stump grinder

100 - 300 HP 70 cm 870 mm 1565 kg 250 cm

- Telescopic 40 cm
- Above ground 50 cm
- In ground 70 cm

Options:

- Auto-pilot control
- Rubber screens



Greentec PIRANHA 10 arm stump grinder

150-400 HPO 145 cm 1000 mm 2450 kg 370 cm

- Length first arm 200 cm
- Length second arm 130 cm
- Above ground 180 cm
- In de grond 145 cm
- Proportional control of all functions
- Autospeed



Greentec FORESTCUTTER



Greentec FORESTCUTTER 300

7,5 - 16 tonnes | 300 mm | 55-175 l/min | 1070 mm | max. 350 bar

Options:

- Collecting unit
- Swivelhead
- Various oil engines and quick changes



Greentec FORESTCUTTER 370

13 - 25 tonnes | 370 mm | 140-190 l/min | 1160 mm | max. 350 bar

Options:

- Collecting unit
- Swivelhead
- Various quick changes



Greentec Forestmulcher

Greentec Forest mulcher 1300 / 1500

12-25 tonnes ≥ 885 kg | 130-200 ltr | 200-380 bar | 12/24 V

- Working width (mm): 1250 | 1500
- Machine width (mm) 1570 | 1820

Options:

- Hydraulic swivelhead (270°)
- Quick change





Greentec Forestmulcher COMPACT 950 C / 1250 C / 1550 C / 1850C / 2150C

315-495 kg | 70-150 ltr | 200-380 bar | 12/24 V

- Working width (mm): 950 | 1250 | 1550 | 1850 | 2150
- Machine width (mm): 1131 | 1431 | 1731 | 2124 | 2424

Options:

- Various quick changes for attachment to crane and tool carrier



- Crane mounted



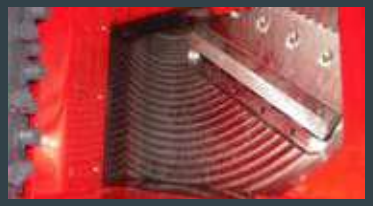
- Tool carrier



CHEETAH 30



- A disc chipper gives high production with relatively little power
- All the material gets pulled in under an infeed angle of 50 degrees. Because of this the 2 knives also help with pulling in material, in combination with the 2 aggressive infeed rollers making the infeed of this machine very powerful
- The large disc fitted with specially designed fanblades easily blow material through a 5 metre shoot over the cab of a tractor
- Two powerful aggressive vertically amounted feedrollers crush and feed branches easily
- Heavy duty robust construction means the machine runs very smoothly and reliably for years
- Lower RPM means the Cheetah 30 runs quieter.


Massive disk Ø 960 x 58mm


Cutting length up to 25 mm



Unimog front


Hightipper


320 x 300 mm


1300 x 300 mm



≤ 30cm


80-200 HP


75-140 HP



12 - 25 mm


Ø 960 x 58 mm


Compact rear


Compact front


Chassis


Hightipper VC8


Hightipper VC12


Hightipper VC13
40 or 80km/h


14m3 rear infeed


<3,5t fast traffic


<6,5t fast traffic


Track

CHEETAH 45



- The Greentec PTO Cheetah 45 is a compact disc chipper for tractors from 200HP to 450HP
- A heavy-duty power train and a disc of nearly 80mm thick gives a huge capacity
- 50 degrees cut angel, 3 aggressive infeed rollers, and 3 blades provide a triple action pull and a very powerful infeed
- The machine has no dead space, so no material gets caught up
- The infeed rollers are powered by internal heavy duty Poclain Hydraulic motors, max working pressure 320 bar
- The machine produces uniform course woodchips, with a low dust percentage
- The large disc is equipped with special blower blades giving a powerful discharge, allowing a 5m long chute over the tractor
- An ergonomically mounte crane (if required) eliminates visual obstructions


3-point linkage mounted


Cutting length up to 36 mm


Mounted on Claas Xerion


Hightipper


450 x 700 mm


450 x 1000 mm



≤ 45cm


200 - 450 HP



16 - 45 mm


Ø 1450 x 78 mm

JAGUAR 40



- A 400mm x 600mm infeed makes this machine suitable for a wide range of jobs
- The large 450mm diameter top feedroller is very aggressive and powerful
- Quick change knives are fitted as standard
- An optional infeed table makes chipping of brash and foliage very easy and efficient
- Chip size is controlled be a very easily accessible and changeable grate
- A simple and logical user interface maximises output and performance and minimises maintenance costs
- All wear parts are easily replaced minimising downtime.



Standard equipped with quick change knives



Integrated hydraulic infeed rollers no need for infeed side channels



Hightipper



3-point linkage mounted


600 x 400 mm


1300 x 440 mm


≤ 40 cm


80 - 200 HP


140 HP


12 - 20 mm


Ø 600 x 600 mm


3-point linkage mounted


Chassis heavy


Hightipper VC8


Hightipper VC12


Hightipper VC13


Rear tipper VC16


<3,5t fast traffic


<6,5t fast traffic


Track

942



- Suitable for chipping green waste, pruning material and large bundles with heavy branches and logs up to Ø 550 mm
- Everything goes in effortlessly, no blind spots, no grooves in the outer wall
- The large top roller with internal drive quickly steps on logs and pulls them in with force
- The machine has a modern look and everything is safely concealed under an easy-to-open hood for periodic service



Heavy-duty internal Poclain motor



3-point linkage mounted



GT 942/13 Bigfoot - Tyres 600/50R22,5



Motormachine


550 x 710 mm


620 x 1060 mm


≤55 cm


100 - 280 HP


300 HP


10 - 25 mm


Ø 960 x 730mm


3-point linkage mounted


Chassis heavy duty


Hightipper VC13


Rear infeed


Rear tipper VC16


Hightipper VC20


Motor


Track

Electric

952MEGA



- The original classic in our range
- The all-round machine with an extra-large top infeed roller, is powered by two internal hydraulic motors, 500x1450mm wide
- This model is an excellent choice for processing whole trees and big tree canopies
- The drum has 4 knives with a 25mm overbite producing uniform wood chips
- The 952MEGA model is built for high productivity. Producing 100 to 150m3 an hour with a powerful chip discharge.




Tracks


Tandem chassis


Motor built on


550 x 1060 mm


600 x 1450 mm



≤ 55 cm


200 - 450 HP


425 HP



12 - 25 mm


Ø 960 x 930 mm


Single axle chassis


Tandem chassis


Hightipper 20/25m³


Motor



Track


Motor built on

962



- A very compact model in its class yet designed for the toughest jobs
- Max chipping capacity 25.5inch (75cm)
- The drum has a 40mm solid outside wall, and a 125mm center shaft
- 6 knives spread over the drum results in even loading and a smooth transition of the material
- The solid blades are adjustable to 34mm (quick change blades max. 30 mm) outside the drum, making the machine well suited to producing large wood chips with minimum dust
- Easy and powerful feeding due to large Ø 620 mm feed roller with integrated Poclain wheel motor. Powered by hydraulic high-pressure system of 350 bar max.
- No openings or obstacles in the outer wall of the infeed due to our integrated drive.




Track


Hightipper


Side infeed 40 km/h


750 x 920 mm


750 x 1450 mm



≤ 75 cm


200 - 450 HP


425 - 684 HP



16 - 34 mm


Ø 960 x 930 mm


3-point linkage mounted


Single axle chassis


Tandem chassis


Hightipper 20/25m³


Motor 40/80 km/h

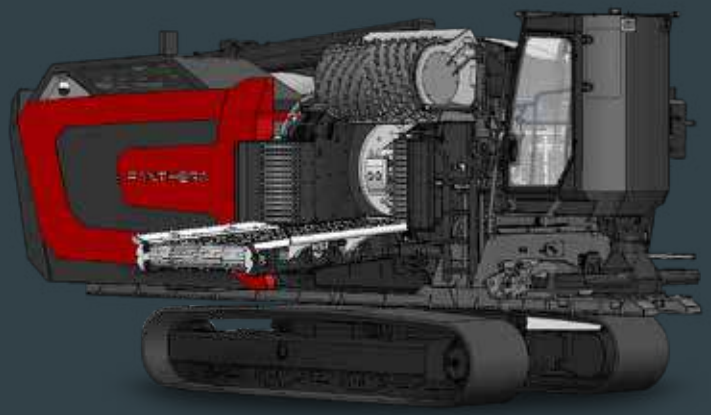

Track


Track side infeed

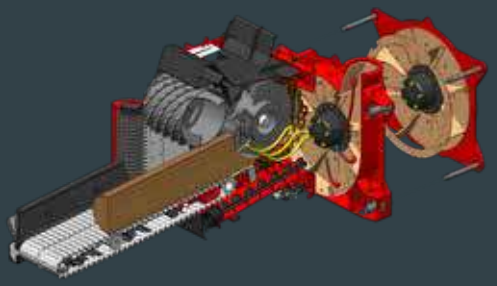

Motor built on


Side infeed 40/80 km/h

PANTHERA



- Ufkes direct flow system, chips are directly blown in the heart of the suction blower
- At this position the blowing blades have the lowest speed. The uniform quality woodchip won't be smashed. The chips are directed to the outside of the blower by the centrifugal force where they come out of the chute with high blowing force
- Rest material of the infeedchain and under the drum will be transported to the blower with 3 augers to avoid spillage underneath the machine
- For logs, the hatches next to the feed chain are hydraulically foldable for easy feeding



Ufkes direct flow system, Chips are directly blown in the heart of the suction blower



The machine is equipped with the latest JD18 Stage 5 engine boasting an impressive 908 horsepower! This engine is unique because it requires no after-treatment (no AdBlue!) while still meeting the strictest emission regulations.


900 x 1400 mm


≤ 90 cm


908 HP


1380xØ 1040 mm


20-55(75) mm


3-axle trailer or semitrailer


tracks


truck mounted 4 - 5 axles


container chassis (hooklift)

UFKES Ragnartech



- Rotor speed 9700 Upswing: 1400 rpm. Rotor speed 9400 Downswing: 450 - 650 - 1000 rpm
- Machine suitable for reducing waste wood, stumps and green waste.
- Ideally suited for high-capacity shredding and reduction.
- Engine: John Deere JD18 908 HP.
- Optional Caterpillar C27 1050 HP.
- Capacity 50-150 tonnes/hour (depending on engine choice, input material and desired end product).
- Berco track components
- Machine can be moved up and down hydraulically at the front and rear, approx. 1 metre extra dumping height, easy to manoeuvre on a 3-axle dolly for transport
- Optional: magnetic belt
- Many pins, bushings and cylinders are universal, minimal parts in stock
- Metal detection system
- Hydraulically extendable service platform
- Complete feed + rotor housing can be opened for quick and easy screen change
- ICAN touch screen control for easy operation of the entire machine, 3 standard programmes, 2 specific programmes possible.
- Radio remote control with colour display, functions easy and clear to operate


Service-friendly: complete feed opens above drum and sieves


Control display


1000x1440 mm


≤ 65 cm


1400 rpm


908 - 1050 HP


1380xØ 1040 mm



October 2025 - Subject to printing and typographical errors

Ufkes Greentec
Kelvinlaan 80
9207 JB Drachten
The Netherlands
+31 (0) 512 - 584 760

WWW.UFKES.NET